


★ **GoldStar**

(J.P. JAIN GROUP)

Manufacturers & Exporters

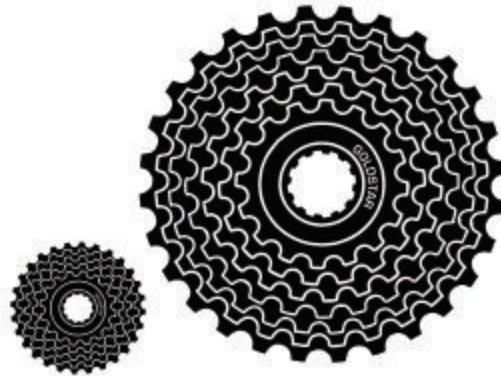

ATTITUDE : Goldstar Industries has always embraced new ideas. With the policy of employing modern practices and technological developments we are establishing ourselves as one of the specialist metalworkers and fabricators.

OUR RANGE : We manufacture products that suit the exact requirements of our clients ranging from small industries to huge multinational manufacturing units. Our constant quest for excellence and a will to scale new heights has made it a name to reckon with.

QUALITY ASSURANCE : We provide most reliable & affordable products of high quality and workmanship which match the international Standards . All our products are subject to rigorous quality control tests and are designed and manufactured in accordance with ISO 9001:2000 quality systems.

CAPABILITIES : The company has been recognized as an Export House by the Government of India. Qualities, like business acumen, hard work and continuous vigilance on the quality of products has made us one of the leading manufacturers and exporters in India .

INFRASTRUCTURE : We have a well-established infrastructure to manufacture Bicycle parts inside our well-integrated workshops covering an area of 17,500 sq. meters. We are India 's 2nd largest Bicycle Freewheel manufacturing unit.

The best available raw materials are used in the manufacturing of components with modern techniques. The company is fully equipped with latest quality control measures along with a hard working and dedicated team for servicing trade inquiries not only of its own manufactured products but also of other engineering goods.

As our customer you will be treated to an efficient and courteous service, with a knowledgeable member of staff whose sole aim is to identify and understand your requirements so that a complete satisfaction can be achieved at your end.

MULTISPEED FREEWHEELS (Index / Non Index)

1/2"x3/32" full steel balls.

Finish - Black, Golden, Blue, CP



GS-1 (3 Speed)

1/2"x1/8" or 1/2"x3/32"

(A) 16-18-20T (B) 16-19-22T



GS-2 (5 Speed)

14-16-18-20-22T (14-22T)



GS-2.01 (5 Speed)

(A) 14-16-18-21-24T (14-24T)

(B) 14-16-18-20-22 (14-22)



GS-2.02 (5 Speed)

14-17-20-24-28T (14-28T)



GS-3 (6 Speed)

14-16-18-20-22-24T (14-24T)



GS-3.01 (6 Speed)

14-16-18-21-24-28T (14-28T)



GS-3.02 (6 Speed Index Type)

14-16-18-21-24-28T (14-28T)

Brown/Black finish 28T sprocket BCP



GS-3.03 (6 Speed)

14-16-18-21-24-28T (14-28T)

Golden Finish



GS-3.04 (6 Speed)
14-17-20-23-26-30T (14-30T)



GS-3.05 (6 Speed Index Type)
Twisted Teeth
14-17-21-24-28-32T (14-32T)



GS-4 (7 Speed)
14-16-18-20-22-24-28T
(14-28T)



GS-4.01 (7 Speed)
14-16-18-21-24-28-32T
(14-32T)



Freewheel Opener



GS-5 (5 Speed Index Type)
14-22, 14-24, 14-28, 14-38T



GS-5.01 (6 Speed Index Type)
14-22, 14-28, 14-38T



GS-5.02 (7 Speed Index Type)
14-28, 14-38T



GS-5.03 (6 Speed Index Type)
14-28T CP/Golden/Black



GS-5.04 (6 Speed)
6/7 speed, 14-34T

SINGLE SPEED FREEWHEELS (2 Pawls Spring Type)

1/2"x1/8" Half or full steel balls. 34.8mm (1.370") x24 TPI BSCY or 34.7mmx1mm ISO- Metric thread, Golden Finish.
Finish - black or to order



GS-6 (16 Teeth)



GS-6.01 (17 Teeth)



GS-6.02 (18 Teeth)



GS-6.03 (19 Teeth)



GS-6.04 (20 Teeth)



GS-6.05 (21 Teeth)



GS-6.06 (22 Teeth)



GS-6.07 (23 Teeth)



GS-6.08 (24 Teeth)



A) Silky Finish



B) Inner view of half ball freewheels



C) Inner view of full ball freewheel

SPROCKET

1/2"x1/8" or 1/2"x3/32", 1.370x24 TPI



GS-7.09 A (12 Teeth)



GS-7.09 B (14 Teeth)



GS-7.09 C (16 Teeth)



GS-7.09 D (18 Teeth)



GS-7.09 E (19-20 Teeth)



GS-7.09 F (21 Teeth)



GS-7.09 G (22-23 Teeth)



GS-7.09 H (24 Teeth)

CHAIN WHEEL & CRANKS



GS-8 (Japan Cut) :

44 Teeth x 6^{1/2}" x 6^{3/4}" / 7" Crank c to c cottered BCP/ Powder coated, with or without the holes.

Other sizes 28T, 32T, 36T, 40T, 46T, 48T, 52T, Crank sizes : 4", 4^{1/2}", 5", 5^{1/2}", 6", 6^{1/2}", 6^{3/4}" & 7". C to C



GS-8.01 (Italian Cut) :

46/48 Teeth x 6^{3/4}" 1/2" x 1/8" or 1/2"x3/32".

Crank Sizes : 6", 6^{1/2}", 6^{3/4}" & 7".



GS-8.02 (Birdhead Cut) :

44/46/48 Teeth.

Cranks 6^{1/2}", 6^{3/4}" / 7".



GS-8.03 (Italian Cut) :

40 Teeth x 5^{1/2}"

Crank Cotterless/cottered with Black/White/BCP chainguard.



GS-9 (Double Chainwheel) :

Cottered/Cotterless, with/without chainguard 1/2"x3/32"x40T-48T & 52T Crank sizes : 6^{1/2}", 6^{3/4}"



GS-9.01 (Triple Chainwheel) :

1/2"x3/32"x28T-38T & 48T Crank sizes : 6^{1/2}", 6^{3/4}"




GS-9.02 (Triple Chainwheel) :

Plastic coated with cotterless spider Crank 1/2"x3/32"x28T-38T & 48T Crank sizes : 6^{3/4}" (170mm)



GS-10 (Spare Crank) :

"A" 6^{3/4}" Plastic coated left crank. "B" Cotterless. BCP/Powder coated left crank length to order "C" Cottered. Available in British/French/Italian standard BNCP/Powder coated, length to order.

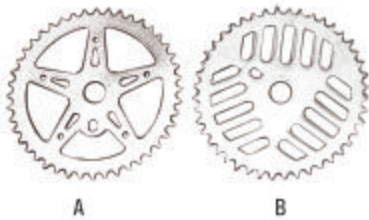

GS-11 (Chainwheel) :

Model A, B
Chainwheel 44 Teeth 1/2" x 1/8"
for one piece crank BNCP/Powder
28/32/36/40/44/48/52



GS-12 Chain Wheel Olympic Cut :

Cottered CP
44T/46T/48T



GS-13 Bird Cut : Cottered

44T/46T/48T
Crank Size :6-1/2, 6-3/4, 7"
For Chain 1/2" x 1/8"



GS-13 A Double Chainwheel :

Cottered 170 mm with & w/o steel gaurd
Teeth : 38-48/40-48/42-52
For Chain 1/2" x 3/32"
BCP/Black Powder Coated

HUBS



GS-14 (Phillips) :

Front : Thick barrel, open ends,
BCP hub axles 3/8"x5 1/2".
Rear : Thick barrel, open ends,
BCP hub axle 3/8"x6 1/2".
Spoke holes 20/28/32/36/40Hx14G.
Thread on flange 1.370x24 TPI BSCY
spoke holes of 10g & 12g to order.



GS-14.01 (Raleigh) :

Front : Thick barrel, open ends,
BCP hub axles 5/16"x5 1/2".
Rear : Thick barrel, open ends, BCP
hub axle 3/8"x6 1/2", Spoke holes
20/28/32/36/40g. 1.370x24 TPI BSCY
or 34.7mm x 1mm pitch ISO-Metric thread.



GS-14.02 :

Hub Front and Rear PRX
3/8"x6 1/2"x3/8"x6 1/2",
Groved Axle 36 holes x 14g.



GS-15 A :

Heavy Duty
28 x 1.50 40 Hole



GS-15 B : (Oval Multispeed)

MTB hubs oval type hub axles.
Front : 3/8"x140mm across nuts
96/998/100mm
Rear : 3/8" x 165/170/175mm
across nuts 126/128/130mm
Thread : 34.8mmx24 TPI BSCY
Spoke hole 14Gx36H



GS-15 C :

Hub Rickshaw Heavy Duty
3/8" x 7", Holes 64/14 or 12G



GS-15 D :

Hub Rear PRX
3/8" x 7"
(36 Hole x 14G)
with Spacer for
Multi Speed



GS-16 :

Coaster Type Hub
with complete fitting
For back Peddle Brake Number
of Spokes & Axle Length to order



GS-17 : (Oval MTB Quick Release Multispeed)

Barrel plastic ocated in assorted colours.
Front : 3/8"x102/106/108mm, across
nuts 96/98/100mm Rear 3/8"x136mm
Thread 34.8mm x24 TPI



GS-18 : (Quick Release Oval)

Front : 3/8"x102/106/108mm, across
nuts 96/98/100mm Rear 3/8"x136mm
Thread 34.8mm x24 TPI



GS-19 : (Quick Release Skewer)

Front : 5mmx1212/126/130mm
Rear 5mmx155/160mm



GS-20 : (Quick Release)

Alloy Hub 36 Holes
Front & Rear

HUB AXLES

with cones, nuts, washers, with or without check nuts,
or grooved, Otto Black/NP/ZP to order. 26 TPI BSCY thread.



GS-21 (Phillips) :

F. 3/8"x5 1/2"/6"
R. 3/8"x 6 1/2"/7".



GS-21.01 (Raleigh) :

F. 5/16"x5 1/2"/6"
R. 3/8"x 6 1/2"/7".



GS-21.02 ("A" Model) :

F. 5/16"x5 1/2"/6"
R. 3/8"x 6 1/2"/7".



GS-21.03 (American) :

F. 5/16"x5 1/2"/6"
R. 3/8"x 6 1/2"/7".



A B C D



E F G H

GS-22 :

(Hub Steps)
5/16" or 3/8" x 26 TPI
Length & Color to order



GS-23 (Hub Cups) :

"A" without collar "B" with collar
F. 3.8/24.5/25/29. mm
R 29/29.2/29.5/30/30.5 mm
finish to order.



GS-24 (Hub Cones) :

Philips/Raleigh/Model
"A"/American/French



GS-25 (Hub Nuts) :

Philips/Raleigh/Model
"A"/Flanged/Hexagonal
type 38"/5/16"



GS-26 :

Check Nuts for
Hub Axles 3/8"/5/16"



GS-27 : Washers for
Hub Axles 3/8"/5/16"

CHAINS



GS-28 :

1/2"x1/8" : Roller chains made from medium carbon steel, heat treated in black blue finish in 72/78/92/104/108/112/114 Links or in 150 mtr. rolls.



GS-29 :

1/2"x3/32" : Roller chains made from medium carbon steel, heat treated in black blue finish in 108/112/116 Links or in 150 mtr. rolls.



GS-29 A :
Roll 150m



GS-30 (Cotter Pins)

Complete with nuts & washers in ZP finish,
Threads - 6.7mm x 26 TPI or 6mm x 1mm
a) 8.5mm b) 9.00mm c) 9.5mm d) 10mm
d) 10.50mm e) 11mm




GS-31 (Chain Links)

Chain connecting links
spring clip type.
3/32", 1/8"



GS-32 (Chain Adjuster)


Open ends for 3/8", 11mm & 12 mm
Threads : 1/4" x 26 TPI

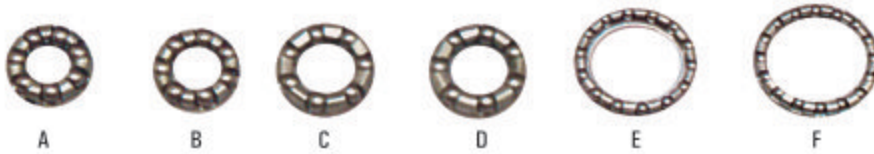

GS-33 (Ball Retainers)

a) 3/16", x 7 balls for front hub,
b) 1/4" x 7 balls for rear hub 11mm & 12 mm
c) 1/4" x 7/9 balls for B.B fittings
d) 1/4 x 11 balls for OPC
e) 5/32 x 14 balls for fork fittings
f) 5/32x 16 balls for fork fittings
g) 5/32 balls

B.B. AXLE GS-34



Made of low carbon steel, hardened
& ground. In Otto black/Zp/BNCP
& Black & Ground finish.

Model No.	Item Code	Left	Centre	Right	Total Length	Dia
2-C	GS-33.01	37	54	46	136	
A-B	GS-33.02	34.5	61.5	45	141	
SLR	GS-33.03	36	55	47	138	
Y-3	GS-33.04	40	5	49	141	Min 15.65
Y-4	GS-33.05	34	5	44	130	Max 15.80
Y-5	GS-33.06	36	4	46	136	
Y-15	GS-33.07	34	54	4	130	
Y-16	GS-33.08	36	57	46	139	
Y-18	GS-33.09	37	51	50	138	
Mini	GS-33.10	51	56	51	158	
Mexican	GS-33.11	45	55	45	145	
Argentina	GS-33.12	45	57	45	147	
			Bracket Width			
3-U	GS-33.16	55	40.5	130.5	70	
5-U	GS-33.17	55	35	122	70	

B.B. CUPS



GS-37 (Hexagonal French) : 1.37" x 24 TPI RH & LH 34.80mm 24TPI L&L, R&R, L&R, PH/T



GS-38 (Phillips Type) : 35mm x 1mm pitch, PH/T



GS-39 (Phillips Type New) : cold forged with slot type key ZP finish.



GS-40 (Italian Type) : 1.37"x 24 TPI RH & LH



GS-41 (Raleigh) : 34.8mm 26 TPI RH & LH



GS-42 (French Type) : 35mm x 1mm ptch RH & RH Metric thread



GS-35

Cotterless (Bolt Type) Axle in black finish



GS-36

Thomson Type BB Axle & Cup Set



GS-43 (B.B. Parts for O.P.C) : Set of 7/9 pcs. Ball racer cups 51.5mm dia, ball racer cones RH 15/15"-24 UNS-RH, LH 7/8-24 UNS-LH, Lock Nut 7/8"-24 UNS-LH

FORK FITTING



GS-44 RL Type

Fork Fittings RL Type Set of 5 pcs. BCP Finish, 26 TPI (24TPIx1") size 5/32" Balls



GS-45 A Zebra Type

Fork Fittings Brazilian/ Zebra Type set of 6 pcs. BCP Finish, (25.4 TPIx24TPI) Ball Retainer set of 2 pcs. Extra, ball size 5/32"x14x16 balls



GS-45 B Ph. Type

Fork Fittings Ph. Type set of 7 pcs. BCP Finish, (24 TPIx1") size 1/8" balls



GS-46 U Type

1"x24 TPL set of 5 BCP



GS-46 A Heavy Type

set of size 3/16



GS-46 B French Type

Fork Fittings French Type Set of 6 pcs. BCP (25mm x 1mm Thread)
Ball Retainer Set of 2 pcs extra ball, size 5/32" x 14 balls



GS-47 BMX/R Type

Fork Fittings BMX Type set of 6 pcs. BCP Finish 24 TPI balls retainer set of 6 pcs, Extra, Balls size 5/32" x 14/16 balls



GS-48 Crown Cover BCP

Fork Fittings Brazilian/ Zebra Type set of 6 pcs. BCP Finish, (25.4 TPIx24TPI) Ball Retainer set of 2 pcs. Extra, ball size 5/32"x14x16 balls

PEDALS



GS-49

City Light



GS-50

Kid with ball/ without ball



GS-50.01

Eagle



GS-50.02

Jumbo



GS-51

Plastic Hi-Impact Body



GS-52

Big Oval



GS-52.01

House Shoe



GS-52.02

Small Oval



GS-53

D-10



GS-53.01

D-10 Double Color PVC



GS-53.02

Y2K Model
Monoblock BMX x1pc. with inner bow with Reflector



GS-54

Impact Model
Plastic Body with Reflector



GS-55

Fan Type (Jumbo)
MTB Plastic Body with Reflector



GS-55.01

Spring Type
Plastic Body with Reflector



GS-55.02

BMX Six Holes



GS-56
PD-40



GS-57



GS-57.01



GS-57.02



GS-57.03

HANDLE BARS

Built of quality (ERW) tubes, 22.2mm (7/8") suitable for roadster, sports, MTB & BMX Bicycles, BNCP/Powder Coated finish.



GS-58 (Phillips Type) :

For side pull brakes, 75mm (3") tee-lug, double levers, width 17^{1/4"}
Raise 2^{3/4"} Stem size - 7^{1/2"}/9"



GS-58.01 (Releigh Type) :

For centre pull brakes, 65mm tee-lug, double levers, width 17^{1/4"}
Raise 2^{1/4"} Stem size - 7^{1/4"}/6^{1/4"}



GS-58.02 (Mexican Type) :

For side pull brakes, half race type bend, 75mm (3") tee-lug & double levers, Width-17^{1/4"} Raise 2^{1/4"} Stem size - 7^{1/2"}



GS-58.03 (SLR Type) :

Adjustable 1^{20"} extension stem. width 19^{1/4"} Raise 3^{1/2"} Stem size - 7^{1/2"}



GS-58.04 (Racer Type) :

Deep curved bar with adjustable & taped stem size- 6 1/4" / 7 1/4", width 17 1/4"



GS-58.05 (BMX Type) :

For BMX free style bicycles. Hi-Riser handle bar adjustable extension stem & safety bar width 21 1/4" Raise : 73/8" Stem Size : 71/2"



GS-58.06 (MTB Handle) :

with stem swaged black or BCP size 21.1mm to 22.2mm to order finish black powder coated



GS-58.07 (Argentina Type) :

(16x17 Guage)



GS-58.08 (Hi-Riser Type) :

Raised pattern, adjustable 1 3/8" tee-lug, width -21 1/4", Stem Size - 7 1/2"



GS-59 : (MTB Type)

Taper Handle bar for MTB/ATB, Black/CP finish. Width - 580/600mm or to order

BASKET



GS-60

Steel wire basket, black plastic coating with name plate 850 gm, 900 gm 950 gm, 1000 gm

HANDLE STEMS

Made of quality (ERW) steel tubes, mig welded finish black powder coated/BNCP.



GS-61 :
For MTB bikes with Allen type expander bolt, 21/22mm tube, length -150/190mm extension 65, 80, 100mm black/BNCP finish



GS-61.01 :
For MTB bikes with hexagonal type expander bolt.



GS-61.02 :
For ATB/MTB bikes with brake wire hole, hexagonal/allen type expander bolt.



GS-61.03 :
For deep drop racer handle bar, extension 80/60 mm length 150mm



GS-61.04 :
For mountain bikes with Hexagonal Bolt.

HANDLE EXPANDER BOLT



GS-61.05 :
For BMX handle bars, 35/37 mm extension with square cap length - 135/150



GS-62 : sizes 5/16" (7.94mm) x 26 TPI BSCY or 8mm x 1mm pitch ISO-Metric threads length to order. Model A B C or D

HANDLE EXPANDER BOLT



GS-62.01 :
Handle Parts
A : handle levers left & right
B : Plunger rod for phillips
C: Plunger rod for Raleigh

LAMP BRACKETS



GS-63 :
Lamp Brackets A, B & C

MUDGUARD



GS-64 : Ph. Type
Ph. Type Pair with Stay
Wheel Size 28"/26"/24"/20



GS-65 : RL. Type
RL. Type Pair with Stay & Clamp
Wheel Size 28"/26"



GS-66 : BMX/MTB Type
BMX/MTB 'U' for 16"/20"/26"



GS-67 : French Type
French Type (Demi Baloon) Pair with Stay & Fitting (26x1.1/2x1.5/8)

CHAIN COVER



GS-68 : Chain Cover Half
Size 26"/28"



GS-69 : Quarter Chain Cover
Quarter chain cover complete with fitting for 16", 18", 20", 24", 26", & 28"



GS-70 : Chain Cover French
S size 26" x 1..1/2 x 1.5/8
Finish BCP/Royal Blue or to Order

BRAKES



GS-71 : Raleigh Type -
Suitable for roadster bikes, center pull.

CALIPER BRAKES



GS-72 : For MTB/BMX Bikes - side pull, high density steel made, solid levers, BNCP/Powder coated, sizes : A-73, B-97, C-55, D-71 mm approx.



GS-73 : SLR Type Complete with sheet metal levers, side pull, Powder coated/BNCP sizes : 80-92mm, 22-28mm

CANTILEVER BRAKES



GS-74 : Complete set low profile adjuster vertically and horizontally, rigid steel arms sizes A: 80-92mm, B : 22-28mm. Powder coated/BNCP


V BRAKE SET



GS-75 :
V Brake Complete plastic Moulded Black


BRAKE SHOES

GS-76

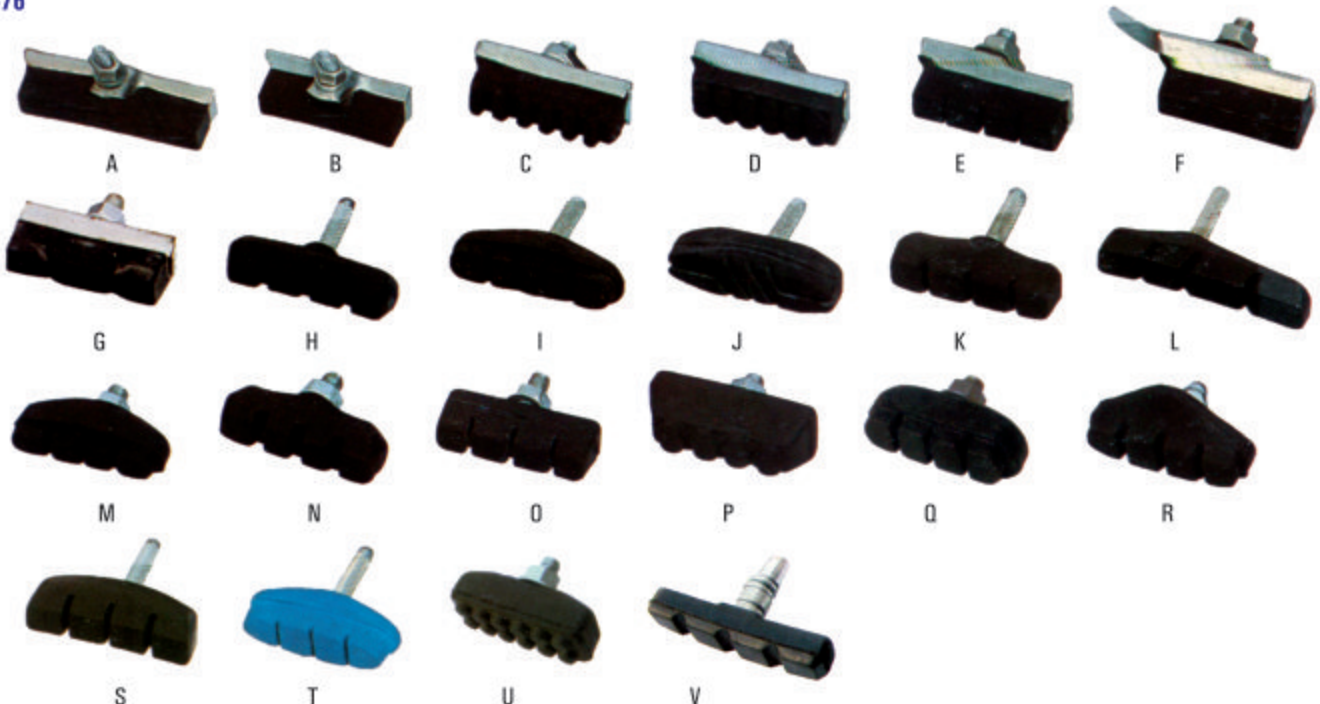

BRAKE LEVERS

GS-77

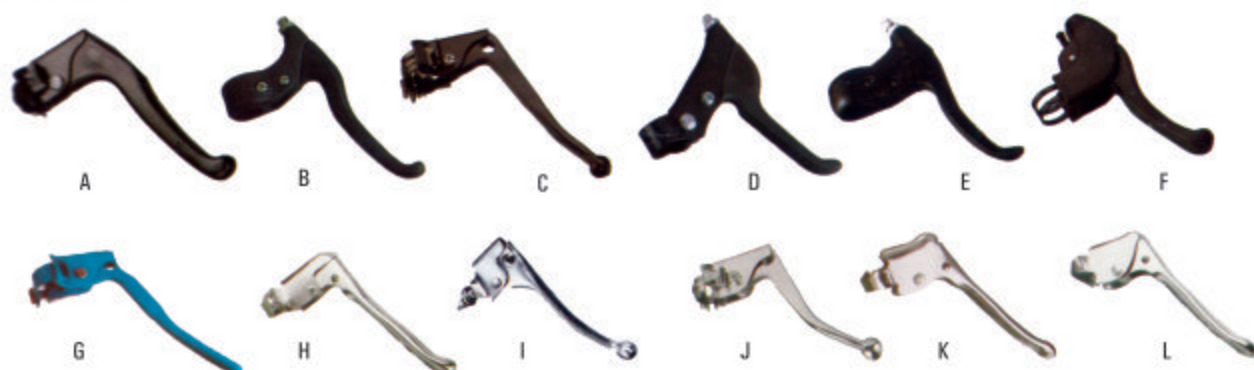

BRAKE WIRES

GS-78



BRAKE INNER WIRES

GS-78.01



SADDLES



GS-79 :

Leather Top roadster, Rear latoo type springs, triple wire base size 292/235x105mm



GS-79.01 :

Leather Top roadster 90x2, Rear twisted coil springs, sizes 260x210x73mm



GS-79.02 :

Leather Top roadster 90x3, Rear twisted coil springs, sizes 290x240x105mm



GS-79.03 :

Vinyl top, plastic base, mattress saddles, single coil springs, size 245x205mm.



GS-79.04 :

Touring saddles, for Demi balloon French bicycles.

GS-80 :



A



B




C



D



E

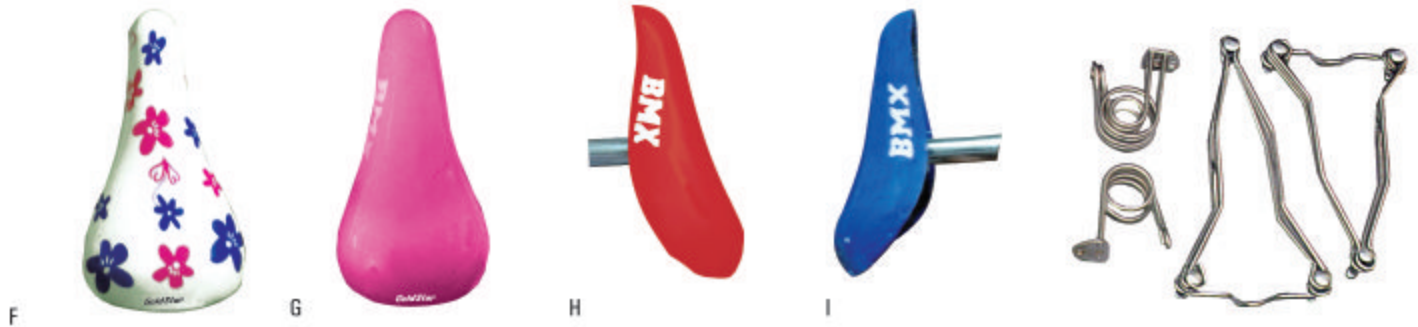


A, B, C, D, E, F, G, H, I BMX Star, ATB & MTB, Vinyl top, plastic base saddles, colours to order

SADDLE PARTS


GS-81 :

SEAT PILLARS

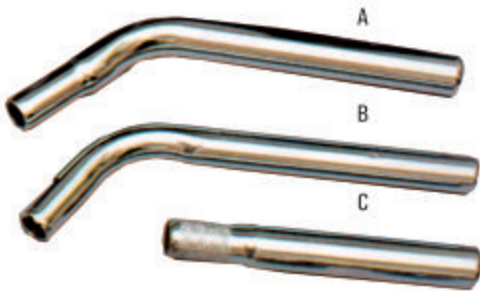

GS-82 : Made of quality (ERW) steel tube ZP/BNCP finish
 A) for BMX Diam :22.2mm (7/8") Length 250mm & 280mm
 B) for BMX Diam : 25.4mmx22.2mm(7/8") Length 325-380mm
 C) for roadster bicycles Diam : 25.4mm(1")x 22.2mm (7/8") length to order

SEAT CLIPS

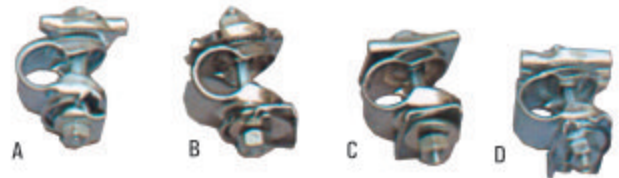

GS-83 : A, B, C, D design/Types for BMX, ATB, MTB, 90x3, 90x2 SLR, wittkop, scooter type saddles size 5/16"x18 TPI ww threads

B.B. SHELLS



GS-84
RL Type Oval Chain Stay



GS-85
RL Type Full Bush with Oil Nipple for Oval chain Stay



GS-86
Ph. Type for Round Chain Stay



GS-87
SLR Sports Model for Round Chain Stay



GS-88
French Type for Round Chain Stay



GS-89
BMC/MTB Type

FRAME LUGS



GS-90
Head Lug Top Ph. Type
Bore Size : 31.75 x 25.4 mm



GS-91
Head Lug Bottom Type
Bore Size : 31.75 x 25.58 mm




GS-92
Seat Lug Ph. Type
Bore Size : 28.58 x 25.4 mm



GS-93
Frame Lug Ph. Type
Suitable for Ph. double bar

FORKS

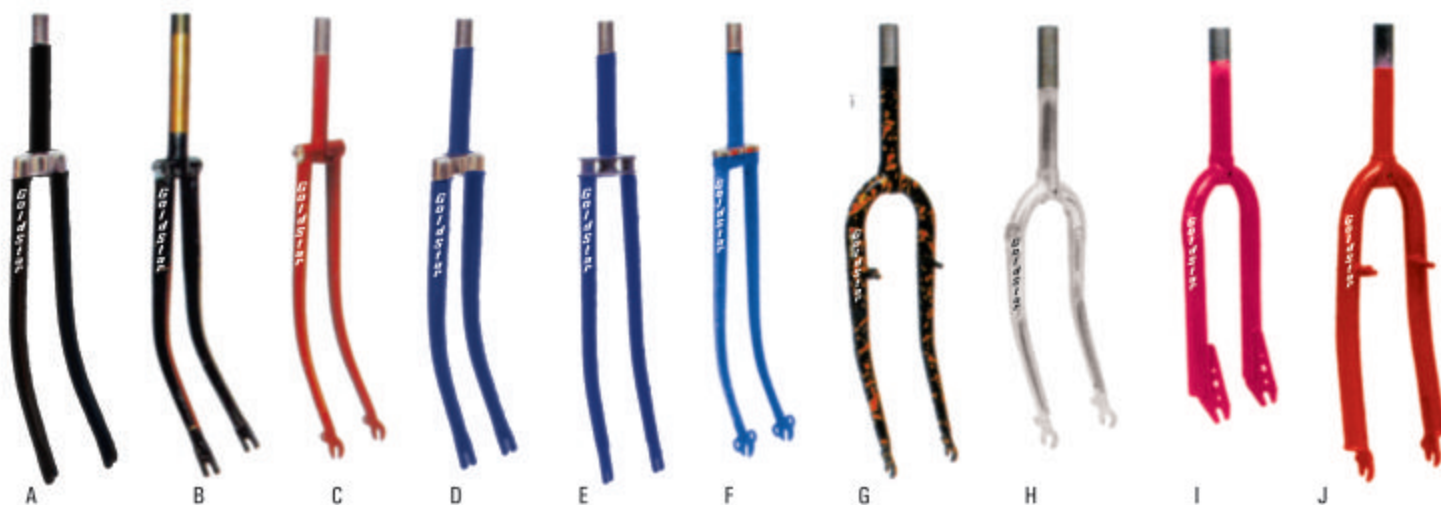

GS-94 A (Ph. Type) For Wheel Size 20/24/26 28/1.1/2", BCP Crown 25.4 x24 TPI, Column Length to order

GS-94 B (RL. Type) For Wheel Size 28/1.1/2", Tubular Crown with BCP Thimbles, 25.4x26/24 TPI.

GS-94 C (SLR Type) For Wheel Size 26/1.3/8", Tubular Crown 25.4x26/24 TPI. Pressed Sheet Ends, Suitable for Caliper Brake

GS-94 D (Baloon Type) For Wheel Size 26x2x1.3/4", Crown 25.4x24/26 TPI. Column Length to order

GS-94 E (Brazilian Type) For Wheel Size 26x1.1/2x2", Threading 24 TPI. Column Length to order

GS-94 F (French Type) For Wheel Size 26x1.1/2x1.5/8", Box Crown 25mm x1mm Pitch ISO Metric Pressed Sheet Ends.

GS-94 G (MTB) For Wheel Size 26x2.125/1.75/1.95", with pivot for Cantilever Brakes.

GS-94 H (MTB) For Wheel Size 26x2.125/1.75/1.95", for Caliper Brakes.

GS-94 I (MTB) For Wheel Size 24x2.125/1.75/1.95", for Caliper Brakes.

GS-94 J (MTB) Over Size Tube 26x2.125/1.75/1.95", with pivot for Cantilever Brakes.

CARRIERS



GS-95 :

Channel Type


Window Cut Carrier Chanel Type with or without Reflector wheel size 24", 26", 28"
Finish BCP



GS-96 :

Channel Type

Carrier channel Type with or without Reflector wheel size 24", 26", 28"
Finish BCP

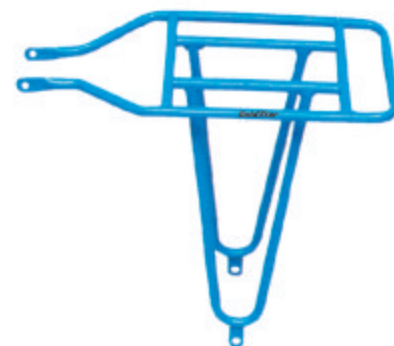

GS-97 :

French Type

All Pipe French Type Fixed Legs
Finish & size to order



GS-98 :
Pipe Body
Pipe Body with Steel Sheet Compressed
Springs for 20" or 22"



GS-99
SLR Type
Carrier Wire Rod SLR with Reflector
wheel size 16", 24", 20", 16"
Finish BCP/Black



GS-100 :
Heavy Duty
Carrier Heavy Duty Channel Type Broad steel
without Catcher & Reflector wheel
size 24", 26", 28"

SIDE & CENTRE STANDS

GS-101

All stands aviable in all sizes
Finish ZP/CP/Black/Coloured



FORK GUARD



GS - 102 A Fork Guard Straight with Dome Nut Spring & Fitting BCP Size 22"/24"

GS - 102 B Fork Guard Bend Type with Taj Type Nut Spring & Fitting BCP Size 22"/24"

HORNS



GS - 103
 A) Plastic Horn with PVC Bulb
 B) Long Plastic Mouth with Rubber Blow Bulb
 C) Medium Size Steel Mouth with Rubber Blow Bulb
 D) Plastic Bell


FRAME LOCK (WITH DOUBLE ACTION)




GS - 105
 A) Rim lock black with fitting & Two side key
 B) Rim lock black/BCP with fittings & two centre keys

FOOT REST

GS - 104

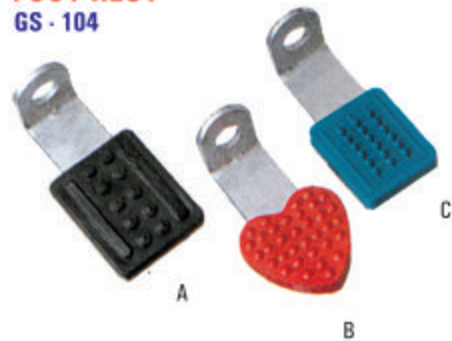


CABLE LOCK

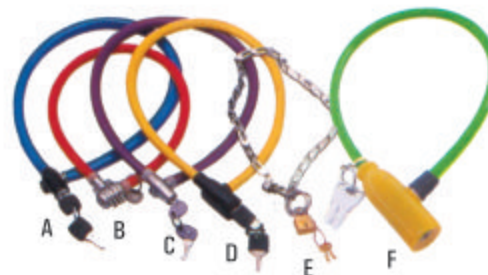

GS - 106
 A) Key Operated B) Combination
 C) Key Operated Steel Lock
 D) Key Operated Plastified Lock
 E) Chain Lock Key Operated
 F) Key Operated Plastified Lock

REFLECTORS

GS - 107

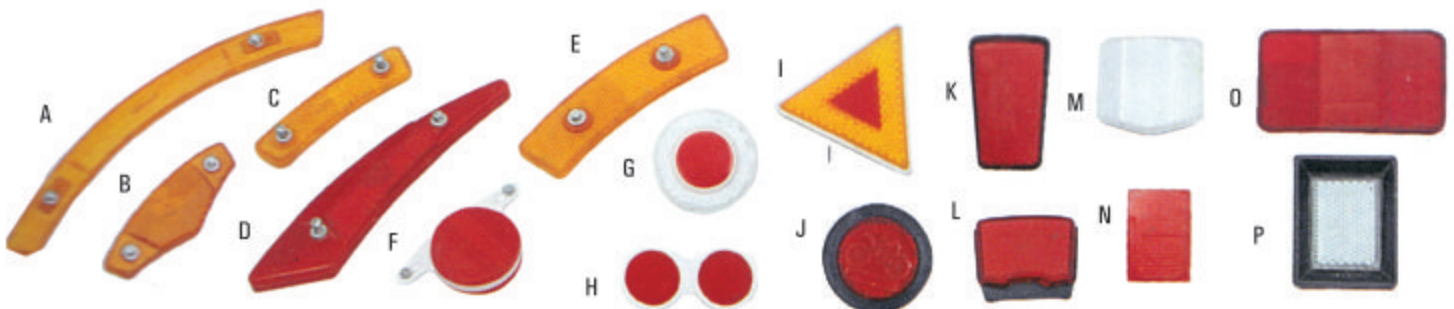

ACCESSORIES




GS-108 Dynamo Lamp Sets
2/6 volts, double bulb, square cut reflectors, complete with clamp tail light & cord.



GS-109 Tools Bags
with 13 hole spanner & type lever/ screw driver.



GS-110 Foot Pump
Heavy duty pump connector for dunlop or american valves



GS-111 Steel Ball Carbon/Chrome steel balls



GS-112 Pump Connectors
for frame pump, braided dunlop/American Valves, sizes : 6" & 8"



GS-113 Frame Pump
Steel barrel, with 6" or 8" braided pump connector, Dunlop or American Valve, size : 1" x 15"L


HANDLE GRIP

GS-114




BELLS

GS-115

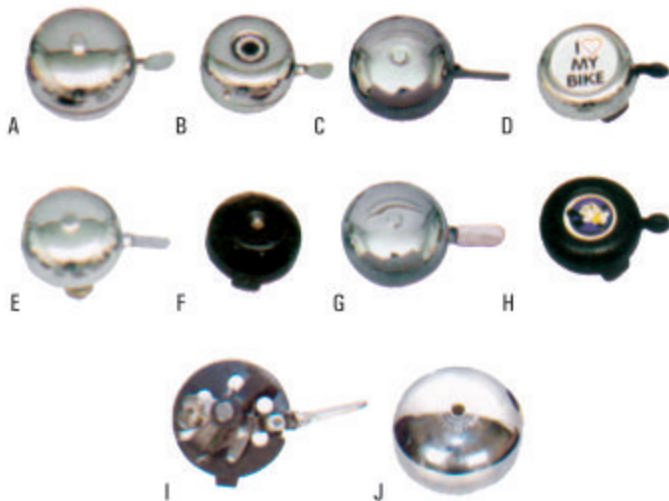


SIDE SUPPORT WHEELS

GS-116

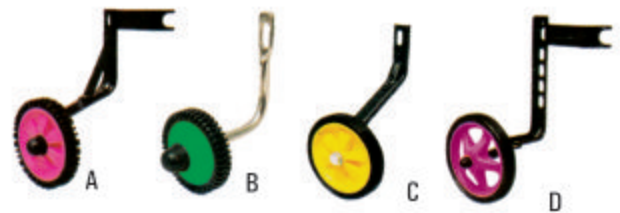

MIRROR GS-117

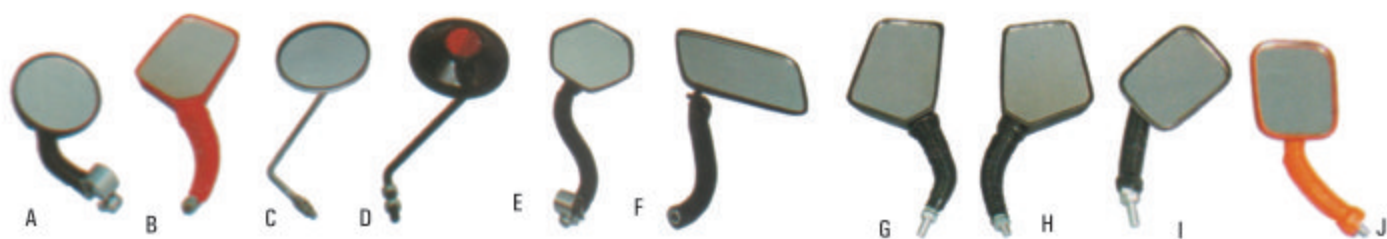

TYRES & TUBES



GS-118

size
28 x 1.1/2
26x 1.1/2

GS-119

size
28 x 1.1/2

GS-120

size
26x1.95, 26x1.75
20x1.95, 20x1.75
18x1.75, 16x1.95
16x1.75, 14x1.75

GS-121

size
28 x 1.1/2

GS-122

size
26 x 1.95

GS-123

size
26 x 2 x 1.3/4



GS-124

size
26 x 1.1/2 x 1.5/8



GS-125

size
26 x 1.1/2 x 1.5/8
12.1/2x2.1/4



GS-126

size
28 x 1.1/2
26x 1.1/2 x 1.5/8



GS-127

Chetak
size
26 x 2x1-3/4
(54-571)



GS-128

Classic
size
24 x1-1/2 (40-457)
26x1-3/8 (37-590)



GS-129

Marshall
size
26 x1-1/2x1-5/8
(44-584)



GS-130

Classic Two Lines
size
26 x1-1/2x1-5/8
(44-584)



GS-131

Premium DX
size
26 x 2x1-3/4
(54-571)



GS-132

Commander
size

16 x 1.95 (54-305)
16 x 2.125 (57-305)
20 x 1.25 (54-406)
20 x 2.125 (57-406)
24 x 2.125 (57-406)
26 x 2.10 (54-559)
26 x 2.125 (57-559)



GS-133

High Track Grip
size

20 x 1.95 (54-406)
24 x 1.19/2.05 (50-507)
26 x 1.9 (50-559)
26 x 1.95/2.0 (50-559)



GS-134

Hunter
size

14 x 1.75 (47-255)
16 x 1.75 (47-305)
18 x 1.75 (47-355)
20 x 1.75 (47-406)
26 x 1.75 (47-599)
26 x 1.95/2.0 (50-599)



GS-135

Kangaro
size

26 x 2.00 (50-599)



GS-136

Tygrys
size

26 x 1.9 (50-599)



GS-137

G.T. 600
size

20 x 1.95/2.0 (50-406)
24 x 1.95/2.0 (50-507)
26 x 1.95/2.0 (50-599)

FORM TYRE
GS-138



TUBES
GS-139





TUBE VALVES
GS-140



English Valve Jointed



Dunlop Valve
(Moulded)



French Valve
(Moulded)



French Valve
(Jointed)



American Valve
(L-50 mm)



English Valve Jointed (with Round Washer)
(L-40 mm)



American Valve
(Moulded)



American Valve
(Full Rubberised)

RIMS



GS-141
Westwood Pattern
Sheet Thk 20G, 18G
(Heavy Duty) Finish BCP
A) 28" x 1.1/2"
B) 26" x 1.1/2"
C) 24" x 1.1/2"
D) 26" x 2" x 1.3/4"
E) 20" x 2" x 1.3/4"



GS-142
Endric Pattern
Sheet Thk 22G
Finish BCP inner side pair
A) 16"/20"/24"/26" x 1.75"
B) 20"/24"/26" / 1.3/8"
C) 26" x 1.1/2" x .5/8"
D) 28" x 1.5/8" x 1.1/4"
E) 27" x 1.1/4"



GS-143
Endric Hook
Bead for MTB with/without
knurling Sheet THK 18G finish
BCP inner side painted
A) 16"/20"/24"/26" x 1.75"
B) 16"/20"/24"/26" x 2.125"
D) 24"/26" x 1.95
E) 12.1/2" x 2.1/4"



GS-144
Westric Pattern
Double Purpose Side
Knurling Sheet Thk 22G,
Finish BCP
A) 16"/20"/24" x 2.125"
B) 24"/26" x 1.3/8"
C) 26" x 1.1/2" x 1.5/8"



GS-145
Westwood Pattern H.D
A) 16"/17"/18" x 19" x 2.25"
B) 16"/17"/18" x 19" x 2.50"



GS-146
Westwood Pattern H.D
A) 23"/26" x 2"

SPOKES

GS-147



Wheel Size	Spoke Length in mm	Wheel Size	Spoke Length in mm
28"	305 to 308	27"	300
26"	271 to 300	24"	251 to 270
20"	191 to 250	18"	171 to 190
16"	135 to 170		

NIPPLE KEYS

GS-148



A) Eight Grooves one side 8G-15G
B) Six Grooves 10G-15G

BI-CYCLES
GS-149





★ *GoldStar*



★ *GoldStar* INDUSTRIES (J.P. JAIN GROUP)

Manufacturers & Exporters of **GOLDSTAR** Bicycle Components
Export House Recognized by Govt. of INDIA

B-70, Phase VIII, Focal Point, Ludhiana-141010, (PB) INDIA
Ph. No. : +91-161-2673116, 17, 18
Fax. : +91-161-2670501 Mob. : +91-98141-73000
Email : exports@goldstarind.com Website : www.goldstarind.com